

BATTERIA SIGILLATA AGM DEEP-CYCLE (USO CICLICO)  
DEEP-CYCLE AGM MAINTENANCE FREE BATTERY

# ZL1201115



### CHARACTERISTIC / CARATTERISTICHE

Volt	12V	
Capacity / Capacità	20h	160Ah
	5h	125Ah
Internal Resistance	Full Charged Battery 25°C ≤4.0mΩ	
Capacity affected by Temperature / Effetti delle temperature sulla capacità	40°C	102%
	25°C	100%
	0°C	85%
Self-Discharge 25°C Capacity / Autoscarica a 25°C	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge cycle / Ciclo di carica	IU + h	"In" max. 30Amp; "V1" 2.43V/cell
	IUIa	"In" max. 30Amp; "V1" 14.4Volt; "If" 1.5Amp.

### CHARACTERISTIC / CARATTERISTICHE

Battery dimensions / Dimensioni batteria			
L/L	W/P	H/A	Tot - H/A
484	171	241	241
Box Dimensions / Dimensioni scatola			
L/L	W/P	H/A	
499	185	299	
Weight / Peso		46 Kg	
Terminal / Terminali		M8	
Case / Contenitore		ABS	




### Amp. (25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	356.4	227.2	193.1	123.3	90.6	83.2	52.9	37.1	25.2	16.6	14.9	8.25
1.65V	349.9	223.1	189.5	121.0	88.9	81.6	51.9	36.5	24.8	16.3	14.6	8.1
1.70V	343.4	218.9	186.0	118.8	87.3	80.1	50.9	35.8	24.3	16.0	14.3	7.95
1.75V	337.0	214.8	182.5	116.5	85.6	78.6	50.0	35.1	23.9	15.7	14.0	7.8
1.80V	324.0	206.6	175.5	112.1	82.4	75.6	48.1	33.8	23.0	15.1	13.5	7.50


### Watts (25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	686.1	437.4	371.6	237.3	174.4	160.1	101.8	71.5	48.6	32.0	28.6	15.9
1.65V	673.6	429.4	364.9	233.0	171.2	157.2	99.9	70.2	47.7	31.4	28.1	15.6
1.70V	661.1	421.5	358.1	228.6	168.0	154.3	98.1	68.9	46.8	30.9	27.5	15.3
1.75V	648.6	413.5	351.4	224.3	164.9	151.4	96.2	67.6	45.9	30.3	27.0	15.0
1.80V	623.7	397.6	337.8	215.7	158.5	145.5	92.5	65.0	44.2	29.1	26.0	14.4

## ZL1201115

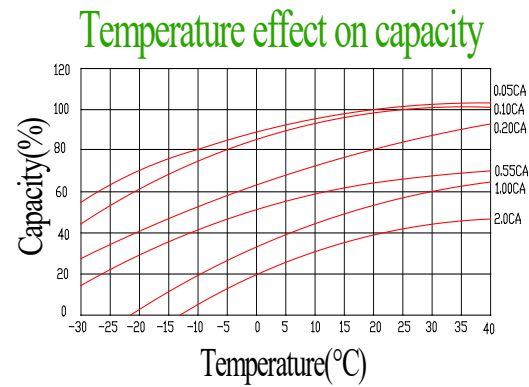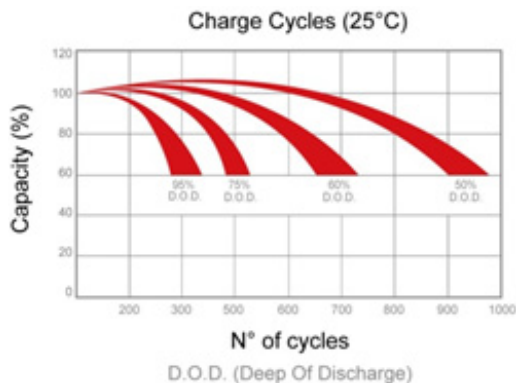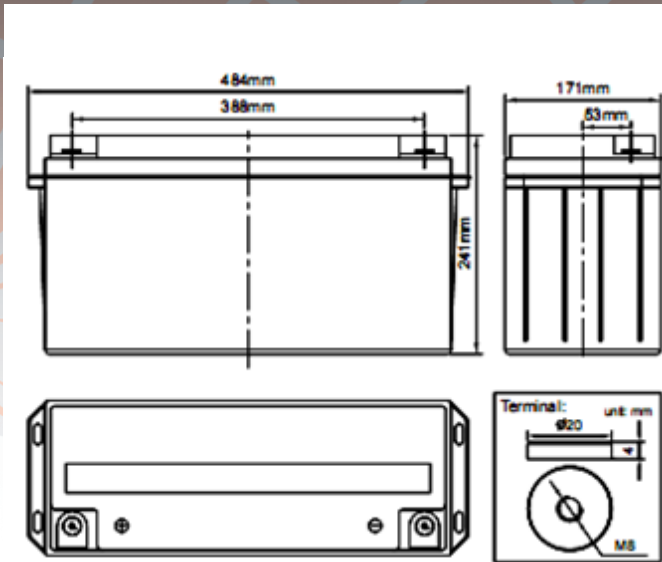


### Charge cycle for sealed batteries (GEL/AGM): IU + holding

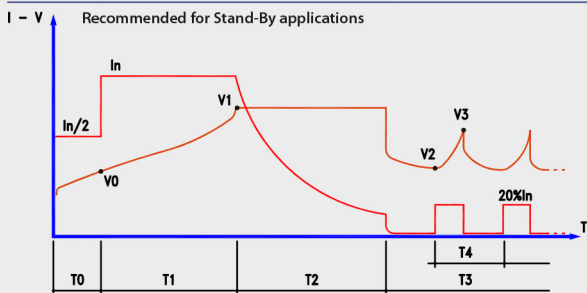

- $I_n$  = PROGRAMMED CAPACITY/10
- $V_0$  = 1,90 V/CELL
- $V_1$  = PROGRAMMED VALUE
- $V_2$  = 2.10 V/CELL
- $V_3$  = 2.30 V/CELL
- $T_0$  = MAX. 1 HR
- $T_1$  = MAX. 12 HRS
- $T_2$  =  $T_1$  (MIN. 2-MAX. 5 HRS)
- $T_3$  = UNLIMITED

“IUIa” charge cycle is always recommended in case of more than 2 batteries in series  
Ciclo di carica “IUIa” è sempre necessario qualora ci siano più di 2 batterie collegate in serie.

### IUIa charge cycle

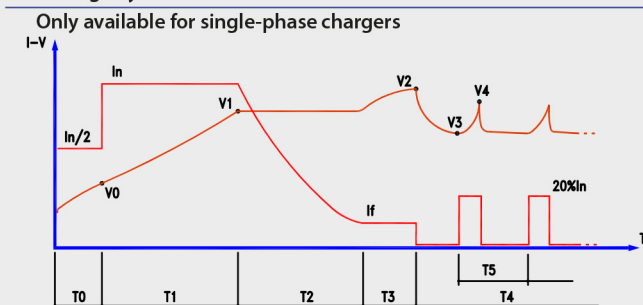

- $I_n$  = PROGRAMMED VALUE (CHARGE I)
- $I_f$  = PROGRAMMED VALUE (FINAL I)
- $V_0$  = 1,90 V/CELL
- $V_1$  = PROGRAMMED VALUE (THRESHOLD V)
- $V_2$  = PROGRAMMED VALUE (LOCK V)
- $V_3$  = 2.10 V/CELL
- $V_4$  = 2.30 V/CELL
- $T_0$  = MAX. 1 HR
- $T_1$  = MAX. 12 HRS
- $T_2$  = MAX.  $T_1 + 6$  HRS OR  $I = I_f$
- $T_3$  = MAX. 4 HRS
- $T_4$  = UNLIMITED
- $T_5$  = MAX. 6 HRS