

Hi-MO X6 Explorer

LR5-54HTH 420~440M

- Adatto al mercato della distribuzione
- Il design semplice incarna uno stile moderno
- Migliori prestazioni di generazione di energia
- Il modulo di alta qualità garantisce un'affidabilità a lungo termine

15

Garanzia di 15 anni per materiali e lavorazione

25

Garanzia di 25 anni per una potenza di uscita extra lineare

Certificazioni complete di sistema e di prodotto

IEC 61215, IEC 61730, UL 61730

ISO9001:2015: Sistema di gestione della qualità ISO

ISO14001: 2015: Sistema di gestione ambientale ISO

ISO45001: 2018: Salute e sicurezza sul lavoro

IEC62941: Linee guida per la qualificazione della progettazione e l'omologazione dei moduli

LONGI






22,5%
EFFICIENZA
MODULO MASSIMA

0~3%
TOLLERANZA
DI POTENZA

<1,5%
DEGRADAZIONE POTENZA
PRIMO ANNO

0,40%
DEGRADAZIONE POTENZA
ANNI 2-25

Valore aggiuntivo

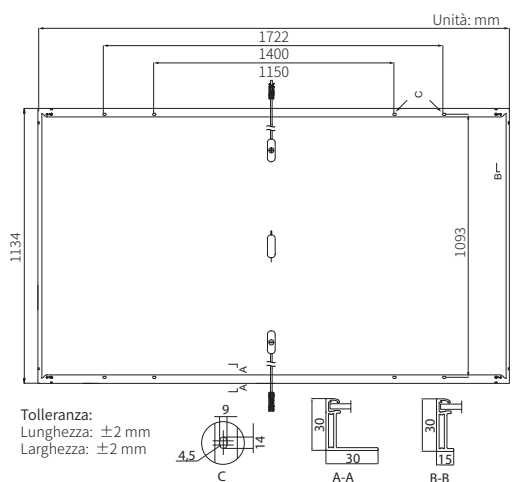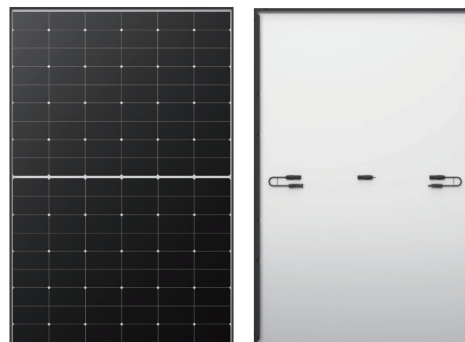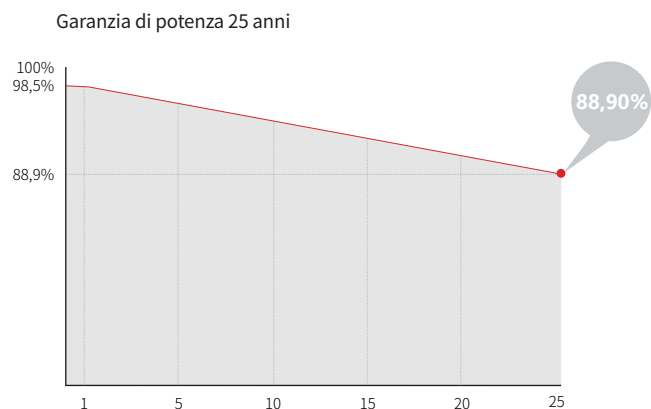

Parametri meccanici

Orientamento celle	108 (6×18)
Scatola di derivazione	IP68
Cavo di uscita	4 mm ² , ± 1200 mm lunghezza personalizzabile
Vetro	Vetro singolo, vetro temperato rivestito da 3,2 mm
Telaio	Telaio in lega di alluminio anodizzato
Peso	20,8 kg
Dimensioni	1722×1134×30 mm
Imballaggio	36 pz. per pallet / 216 pz. per 20'GP / 936 pz. per 40'HC

Caratteristiche elettriche

STC: AM1.5 1000W/m² 25 °C NOCT: AM1.5 800W/m² 20 °C 1m/s Incertezza test per Pmax: $\pm 3\%$

Tipo di modulo	LR5-54HTH-420M		LR5-54HTH-425M		LR5-54HTH-430M		LR5-54HTH-435M		LR5-54HTH-440M	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Condizione di test	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Potenza massima (Pmax/W)	420	314	425	318	430	321	435	325	440	329
Tensione a circuito aperto (Voc/V)	38,73	36,36	38,93	36,55	39,13	36,74	39,33	36,93	39,53	37,11
Corrente di corto circuito (Isc/A)	14,00	11,31	14,07	11,36	14,15	11,43	14,22	11,49	14,30	11,55
Tensione alla massima potenza (Vmp/V)	32,44	29,60	32,64	29,78	32,84	29,97	33,04	30,15	33,24	30,33
Corrente alla massima potenza (Imp/A)	12,95	10,60	13,03	10,67	13,10	10,72	13,17	10,78	13,24	10,85
Efficienza modulo (%)	21,5		21,8		22,0		22,3		22,5	

Parametri operativi

Temperatura operativa	-40 °C ~ +85 °C
Tolleranza di potenza in uscita	0 ~ 3%
Tolleranza Voc e Isc	$\pm 3\%$
Tensione massima del sistema	DC1500V (IEC/UL)
Valore massimo del fusibile di serie	25A
Temperatura nominale di esercizio della cella	45 ± 2 °C
Classe di protezione	Classe II
Classificazione di resistenza al fuoco	Tipo UL 1 o 2 Classe C IEC

Carico meccanico

Carico statico massimo lato anteriore	5400 Pa
Carico statico massimo lato posteriore	2400 Pa
Test grandine	25 mm di grandine alla velocità di 23 m/s



Valori di temperatura (STC)

Coefficiente di temperatura di Isc	+0,050%/°C
Coefficiente di temperatura di Voc	-0,230%/°C
Coefficiente di temperatura di Pmax	-0,290%/°C

Three Phase Hybrid Inverter

SUN-5/6/8/10/12K-SG04LP3-EU



- 100** 100% unbalanced output, each phase; Max. output up to 50% rated power
-  AC couple to retrofit existing solar system
- 10** Max. 10 pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel
- 240** Max. charging/discharging current of 240A
- 48** 48V low voltage battery, transformer isolation design
- 6** 6 time periods for battery charging/discharging
-  Support storing energy from diesel generator

Deye

Stock Code: 605117.SH

Model	SUN-5K -SG04LP3-EU	SUN-6K -SG04LP3-EU	SUN-8K -SG04LP3-EU	SUN-10K -SG04LP3-EU	SUN-12K -SG04LP3-EU
Battery Input Data					
Battery Type	Lead-acid or Lithium-ion				
Battery Voltage Range (V)	40-60				
Max. Charging Current (A)	120	150	190	210	240
Max. Discharging Current (A)	120	150	190	210	240
Charging Strategy for Li-ion Battery	Self-adaption to BMS				
Number of Battery Input	1				
PV String Input Data					
Max. DC Input Power (W)	6500	7800	10400	13000	15600
Max. DC Input Voltage (V)	800				
Start-up Voltage (V)	160				
MPPT Voltage Range (V)	200-650				
Rated DC Input Voltage (V)	550				
Max. Operating PV Input Current (A)	13+13			26+13	
Max. Input Short-Circuit Current (A)	17+17			34+17	
No. of MPP Trackers/ No. of Strings per MPP Tracker	2/1+1			2/2+1	
AC Input/Output Data					
Rated AC Input/Output Active Power (W)	5000	6000	8000	10000	12000
Max. AC Input/Output Apparent Power (VA)	5500	6600	8800	11000	13200
Rated AC Input/Output Current (A)	7.6/7.2	9.1/8.7	12.1/11.6	15.2/14.5	18.2/17.4
Max. AC Input/Output Current (A)	8.4/8	10/9.6	13.4/12.8	16.7/15.9	20/19.1
Max. Three-phase Unbalanced Output Current (A)	11.4/10.9	13.6/13	18.2/17.4	22.7/21.7	27.3/26.1
Max. Continuous AC Passthrough (grid to load) (A)	45				
Peak Power (off-grid) (W)	2 times of rated power, 10s				
Power Factor Adjustment Range	0.8 leading to 0.8 lagging				
Rated Input/Output Voltage/Range (V)	220/380V, 230/400V 0.85Un-1.1Un				
Rated Input/Output Grid Frequency/Range(Hz)	50/45-55, 60/55-65				
Grid Connection Form	3L+N+PE				
Total Current Harmonic Distortion THDi	<3% (of nominal power)				
DC Injection Current	<0.5% In				
Efficiency					
Max. Efficiency	97.6%				
Euro Efficiency	97.0%				
MPPT Efficiency	>99%				
Equipment Protection					
Integrated	DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch Overvoltage Load Drop Protection, Residual Current (RCD) Detection, Surge protection level				
Surge Protection Level	TYPE II(DC), TYPE II(AC)				
Interface					
Communication Interface	WIFI, RS485, CAN				
General Data					
Operating Temperature Range (°C)	-40 to +60°C, >45°C Derating				
Permissible Ambient Humidity	0-100%				
Permissible Altitude	2000m				
Noise (dB)	≤55				
Ingress Protection(IP) Rating	IP 65				
Inverter Topology	Non-Isolated				
Over Voltage Category	OVC II(DC), OVC III(AC)				
Cabinet Size (WxHxD mm)	422×658×254 (Excluding Connectors and Brackets)				
Weight (kg)	38				
Type of Cooling	Intelligent Air Cooling				
Warranty	5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy				
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105				
Safety / EMC Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2				